



JD5-A卫生级过滤器（双法兰）


JD5-A Sanitary Filter Housing (Double Flanges)



参数概述/General Specifications

- 1、材质SUS304, SUS316L;
- 2、最大工作压力150Psi;
- 3、表面抛光处理或拉丝处理。

- 1、Material:SUS304,SUS316L;
- 2、Max working pressure 150Psi;
- 3、Polished or brushing external surface.

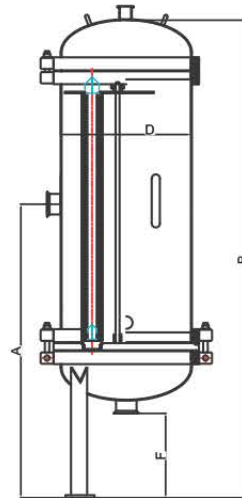

尺寸/Dimension

| 型号/Model | A (mm) | B (mm) | D (mm) | F (mm) | Inlet/ Outlet |
|-------------------|-----------|-----------|-----------|-----------|------------------|
| JD5-A-Φ300x10x30" | 800 | 1590 | Φ300 | 200 | 2"-3" |
| JD5-A-Φ300x10x40" | 800 | 1845 | Φ300 | 200 | 2"-3" |
| JD5-A-Φ350x12x30" | 800 | 1615 | Φ350 | 200 | 2"-3" |
| JD5-A-Φ350x12x40" | 800 | 1870 | Φ350 | 200 | 2"-3" |
| JD5-A-Φ400x16x30" | 800 | 1640 | Φ400 | 200 | 2"-3" |
| JD5-A-Φ400x16x40" | 800 | 1895 | Φ450 | 200 | 2"-3" |
| JD5-A-Φ450x20x30" | 800 | 1665 | Φ450 | 200 | 2"-3" |
| JD5-A-Φ450x20x40" | 800 | 1920 | Φ450 | 200 | 2"-3" |
| JD5-A-Φ500x22x30" | 800 | 1690 | Φ500 | 200 | 2"-3" |
| JD5-A-Φ500x22x40" | 800 | 1945 | Φ500 | 200 | 2"-3" |